

# BCMA HT Series







## FEATURES

- 
- 
- 
- 

°C








## APPLICATIONS


- 

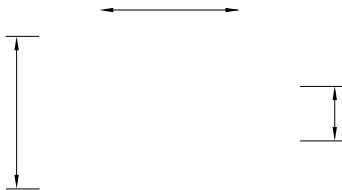

| Part No | Z @ 100 MHz<br>Min.<br>( ) | Z @ 100 MHz<br>Typ.<br>( ) | I <sub>R</sub><br>Max.<br>(A) | R <sub>DC</sub><br>Max.<br>(m ) | V <sub>DC</sub><br>Max.<br>(Volts) | IR<br>Min.<br>(M ) |
|---------|----------------------------|----------------------------|-------------------------------|---------------------------------|------------------------------------|--------------------|
|         |                            |                            |                               |                                 |                                    |                    |
|         |                            |                            |                               |                                 |                                    |                    |
|         |                            |                            |                               |                                 |                                    |                    |
|         |                            |                            |                               |                                 |                                    |                    |
|         |                            |                            |                               |                                 |                                    |                    |
|         |                            |                            |                               |                                 |                                    |                    |
|         |                            |                            |                               |                                 |                                    |                    |


△

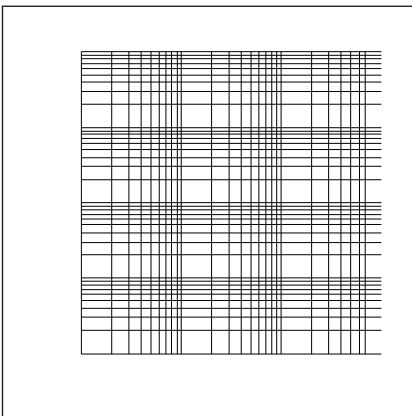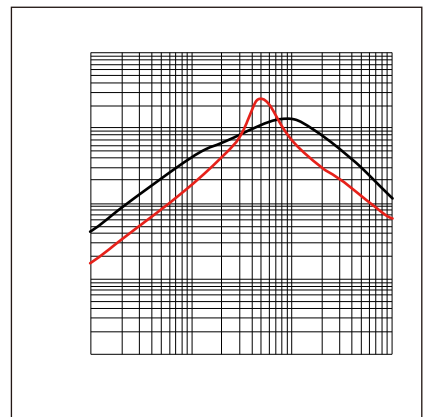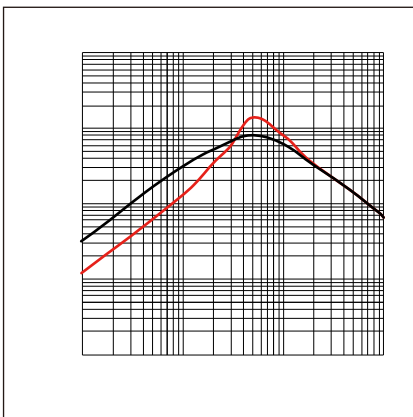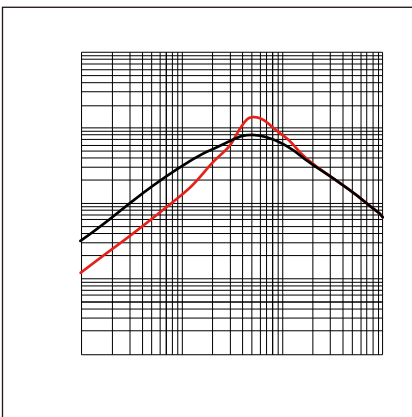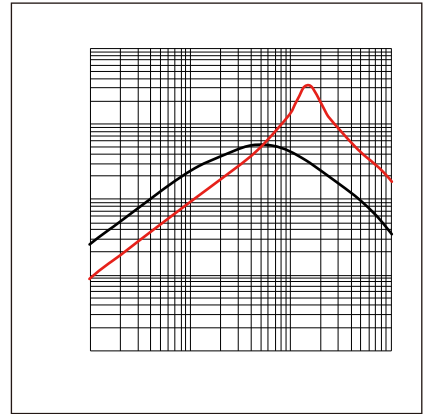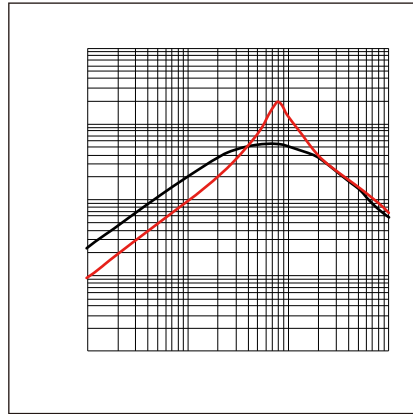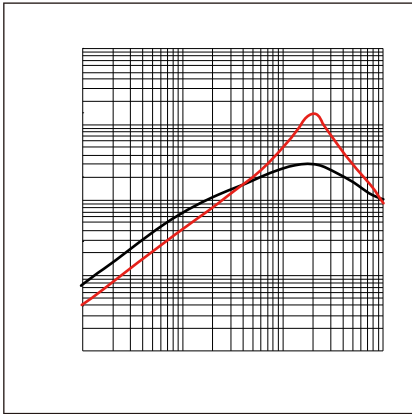

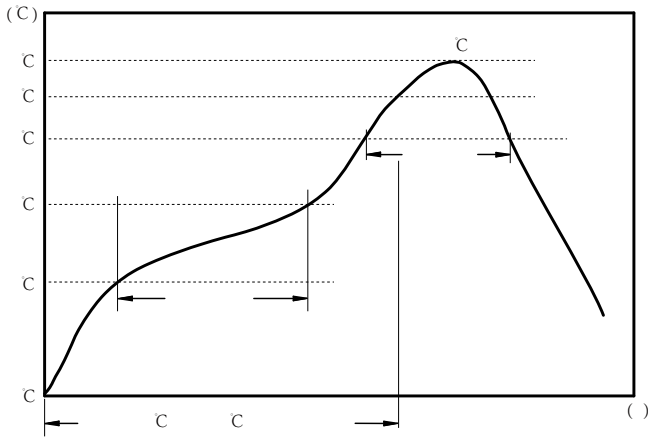


c  
c  
c

:

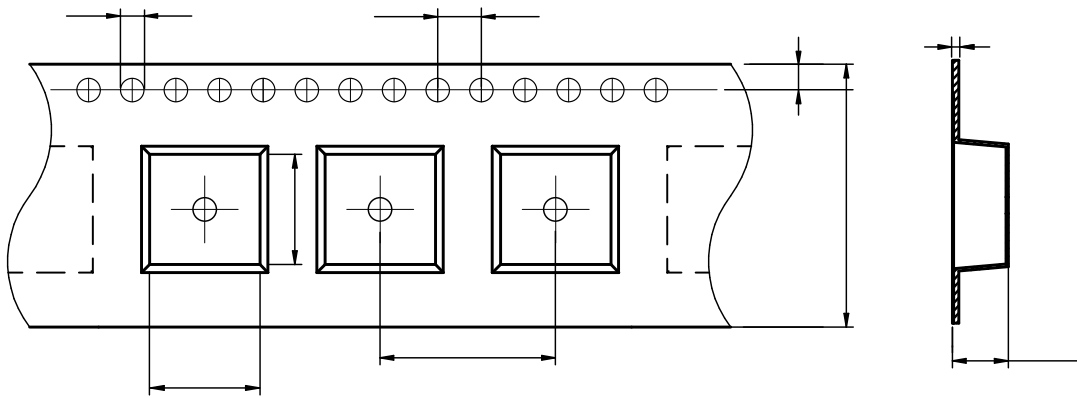





|            |           |           |          |          |           |           |          |           |            |
|------------|-----------|-----------|----------|----------|-----------|-----------|----------|-----------|------------|
| BCMA1513HT | 14.0± 0.1 | 16.0± 0.1 | 1.5± 0.1 | 4.0± 0.1 | 20.0± 0.1 | 24.0± 0.3 | 6.2± 0.1 | 1.75± 0.1 | 0.40± 0.05 |
|------------|-----------|-----------|----------|----------|-----------|-----------|----------|-----------|------------|

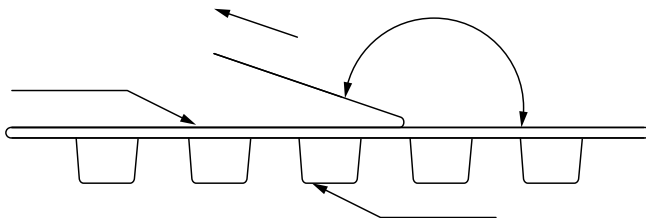


The peel force of top cover tape shall be between 0.10 to 1.17 N

|         |                     |
|---------|---------------------|
| Marking | Printing Impedance) |
|---------|---------------------|


:

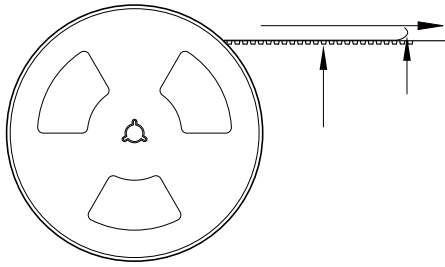

350 Pcs/Reel

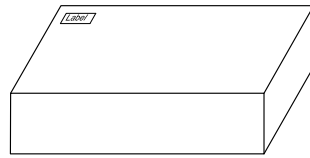

2 Reel /Inner box( 700 Pcs)

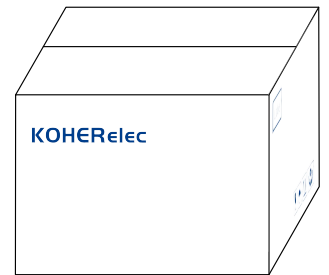

3 Inner box/Carton box(2.1K Pcs)

:

- 
- 
- 
- 
- 
- 
- 
- 
-