

# BCMA Series





## FEATURES

- 
- 
- 
- 
- 
- 
- 



## APPLICATIONS


- 

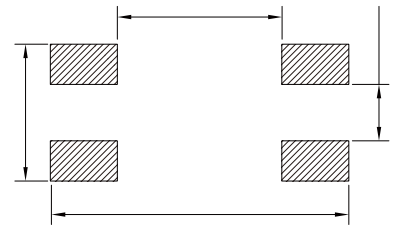


Part No	Impedance Min. ( )	Impedance Typ. ( )	Test Frequency @0.1V	I <sub>R</sub> Max. (A)	R <sub>DC</sub> Max. (m )	V <sub>DC</sub> Max. (Volts)	IR Min. (M )




--	--	--




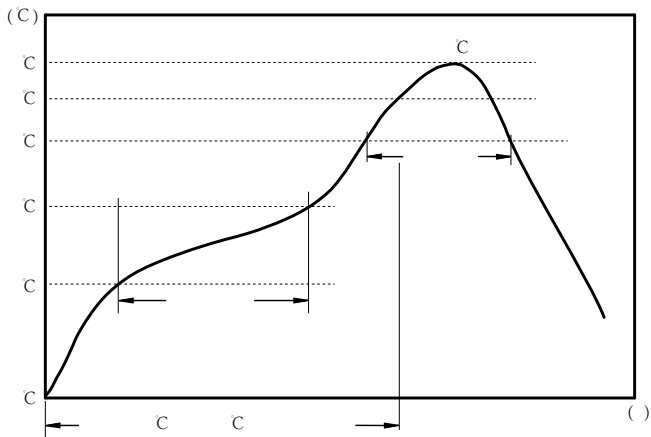

C  
C  
C

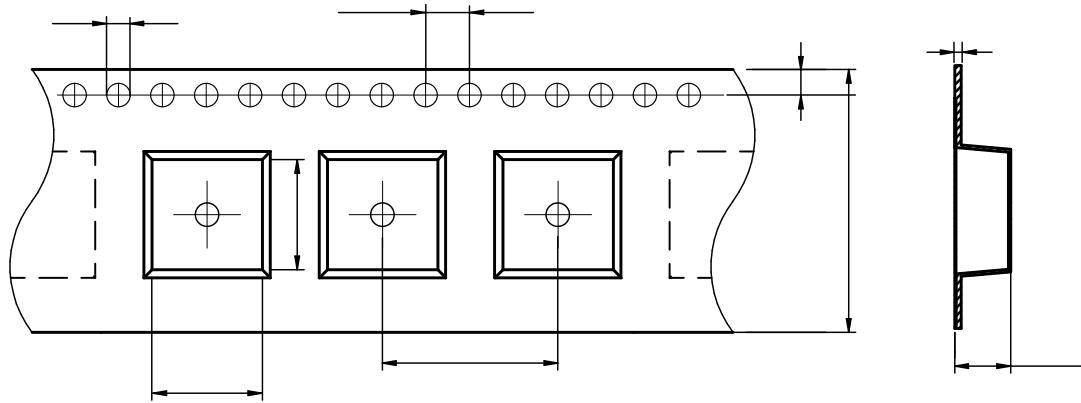






BCMA9070	$7.6 \pm 0.1$	$9.60 \pm 0.1$	$1.5 \pm 0.1$	$4.0 \pm 0.1$	$16.0 \pm 0.1$	$24.0 \pm 0.3$	$5.10 \pm 0.1$	$1.75 \pm 0.1$	$0.35 \pm 0.05$
----------	---------------	----------------	---------------	---------------	----------------	----------------	----------------	----------------	-----------------

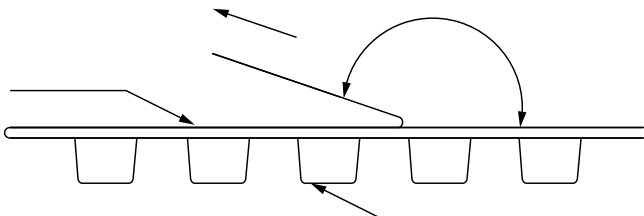

The peel force of top cover tape shall be between 0.10 to 1.17 N

Marking	Printing (Impedance)
---------	----------------------

:

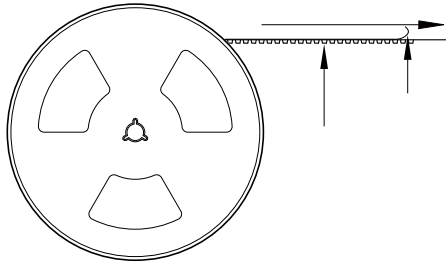

800 Pcs/Reel

2 Reel /Inner box( 1600 Pcs)

3 Inner box/Carton box(4.8K Pcs)

:

- 
- 
- 
- 
- 
- 
- 
- 
-