

# NRSM Series

## Wire Wound SMD Power Inductor Size 4020




### FEATUERS

- 
- 
- 


### APPLICATION

- 
- 

### Dimensions: [mm]

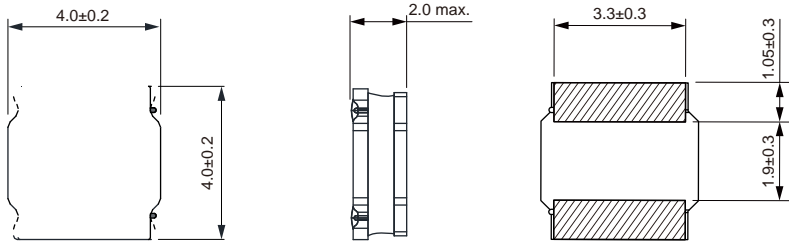

### Land Pattern: [mm]



### Electrical Properties:

Inductor Value	Inductance (mH)	Inductance Tolerance (%)	DC Resistance (mΩ)	DC Resistance Tolerance (%)	DC Resistance (mΩ)	DC Resistance Tolerance (%)	DC Resistance (mΩ)	DC Resistance Tolerance (%)	DC Resistance (mΩ)
NRSM4020S-R24M	0.24	±20%	7.00	6.00	17.0	14.0	0.013	0.017	
NRSM4020S-R33M	0.33	±20%	6.80	5.90	16.0	13.0	0.015	0.020	
NRSM4020S-R47M	0.47	±20%	6.80	5.90	12.0	11.0	0.016	0.022	
NRSM4020S-R68M	0.68	±20%	6.70	5.80	11.5	9.00	0.0192	0.0245	
NRSM4020S-1R0M	1.00	±20%	6.70	5.80	11.0	8.70	0.023	0.028	
NRSM4020S-1R5M	1.50	±20%	6.00	5.20	9.60	7.70	0.032	0.038	
NRSM4020S-2R2M	2.20	±20%	4.80	4.00	7.50	6.00	0.046	0.056	
NRSM4020S-3R3M	3.30	±20%	4.00	3.40	5.90	4.70	0.073	0.088	
NRSM4020S-4R7M	4.70	±20%	3.30	2.85	4.90	4.00	0.095	0.115	
NRSM4020S-6R8M	6.80	±20%	2.80	2.40	4.20	3.00	0.130	0.160	
NRSM4020S-8R2M	8.20	±20%	2.40	2.10	3.80	2.90	0.175	0.220	
NRSM4020S-100M	10.0	±20%	2.35	2.00	3.50	2.80	0.190	0.220	
NRSM4020S-150M	15.0	±20%	1.20	1.00	2.80	2.10	0.305	0.400	
NRSM4020S-220M	22.0	±20%	1.10	0.95	1.50	1.30	0.415	0.545	
NRSM4020S-330M	33.0	±20%	0.86	0.70	1.40	1.20	0.650	0.850	
NRSM4020S-470M	47.0	±20%	0.66	0.56	1.30	1.10	0.950	1.200	

Saturation Current that will cause initial inductance to drop approximately 30%

Temperature Rise Current: For max value, T<40°C; For Typ value, T is approximate 40°C.

## Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

