

FBHA S Series




FEATURES

-
- Compared to the FBA series, has low direct current resistance for with 2 materials of different features
for countermeasures against everything from general signals to high-speed signals.
- Performs well even in signal lines where low direct current resistance is required.
-
-
-












APPLICATION


-

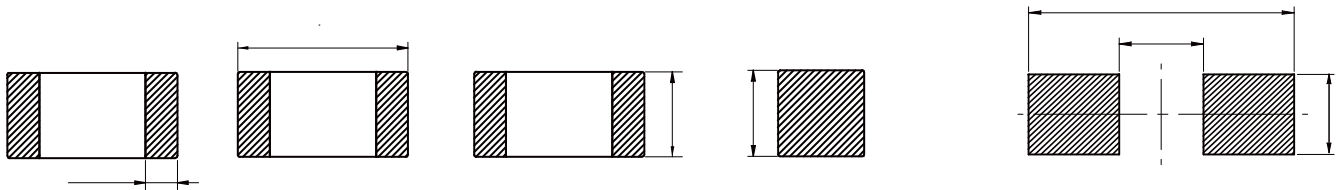


	(Ω)	$\pm 25\%$	(Ω)	(mA)
FBHA0603S-300-502R	30	$\pm 25\%$	0.010	5000
FBHA0603S-600-402R	60	$\pm 25\%$	0.020	4000
FBHA0603S-800-302R	80	$\pm 25\%$	0.030	3000
FBHA0603S-101-302R	100	$\pm 25\%$	0.030	3000
FBHA0603S-121-302R	120	$\pm 25\%$	0.035	3000
FBHA0603S-151-252R	150	$\pm 25\%$	0.040	2500
FBHA0603S-221-232R	220	$\pm 25\%$	0.050	2300
FBHA0603S-301-222R	300	$\pm 25\%$	0.070	2200
FBHA0603S-471-202R	470	$\pm 25\%$	0.090	2000
FBHA0603S-601-202R	600	$\pm 25\%$	0.095	2000
FBHA0603S-101-152R	1000	$\pm 25\%$	0.150	1500



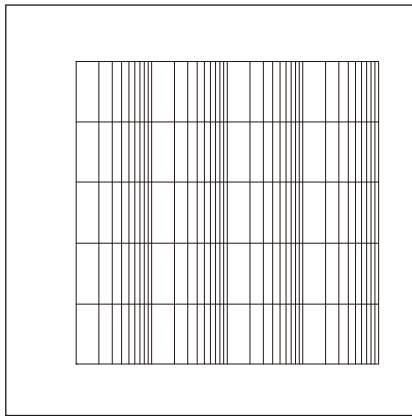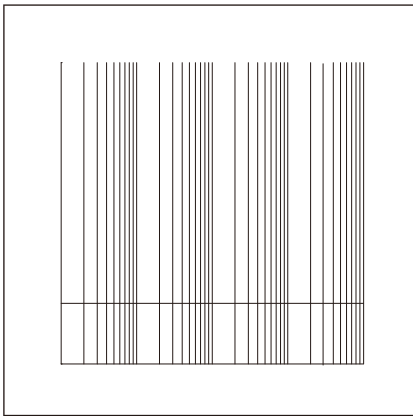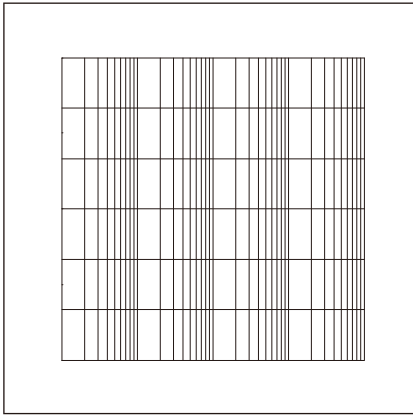

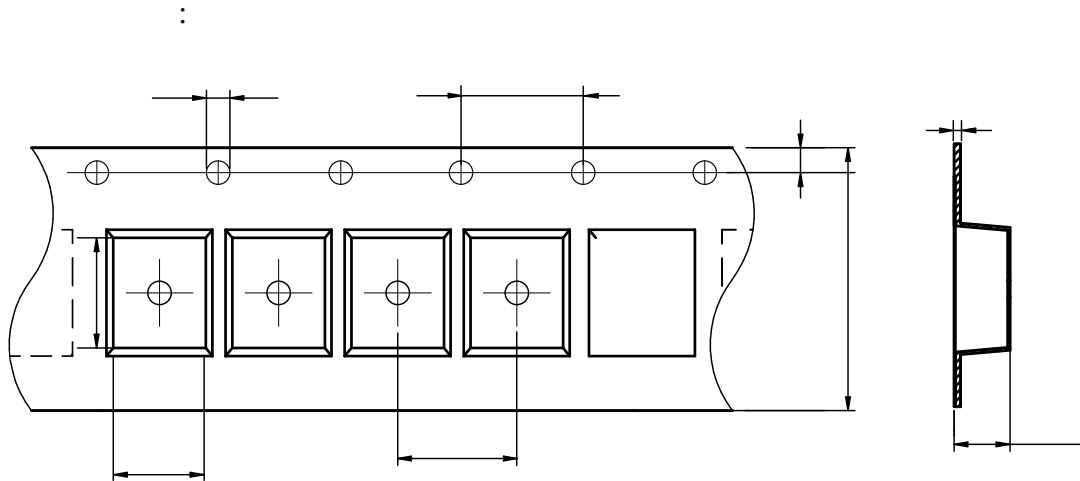

FBHA0603S	1.10± 0.05	1.90± 0.05	1.5± 0.1	4.0± 0.1	4.0± 0.1	8.0± 0.3	0.95± 0.05	1.75± 0.1	0.95± 0.05

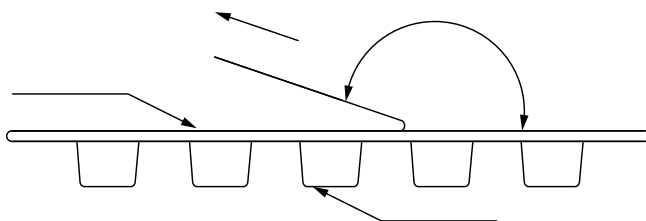

The peel force of top cover tape shall be between 0.14 to 0.58 N

