

MDE Series
Molding Power Inductors
Size 0412

FEATURES

- High rated current
- Frequency up to 3 MHz
- 125 °C
- Low core loss
-
- Halogen Free & ROHS compliant
-
-

APPLICATION

-
- Switch and servers
-
-
-
- SSD modules

Dimensions: [mm]

Land Pattern: [mm]




Electrical Properties:

	(μH)		(mΩ)	Saturation	
					3.25
			83.5		2.75
			195		

Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is ΔT=40°C

Typical Electrical Characteristics:

Inductance vs DC Current Characteristics:

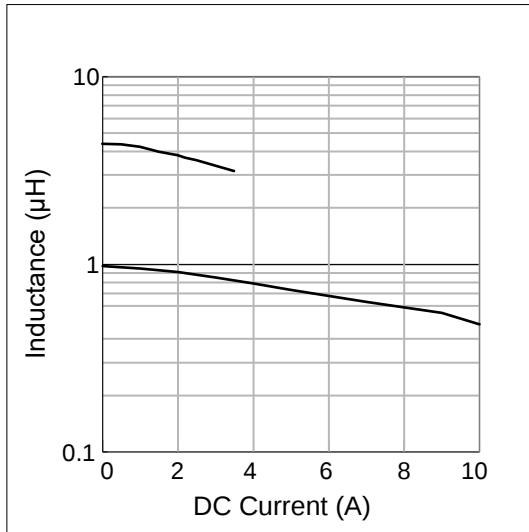

Temperature Rise vs DC Current Characteristics:

