


# MDE Series

## Molding Power Inductors

### Size 0650




#### FEATURES

- 
- 
- $^{\circ}\text{C}$  maximum total temperature operation
- 
- Ultra low buzz noise due to molding construction
- 
- Operating temperature range - 55  $^{\circ}\text{C}$  to + 125  $^{\circ}\text{C}$
- Quantity: 1000pcs


#### APPLICATION

- Laptops and PCs
- 
- Base stations
- DC/DC converters
- Battery powered devices
- 

#### Dimensions: [mm]

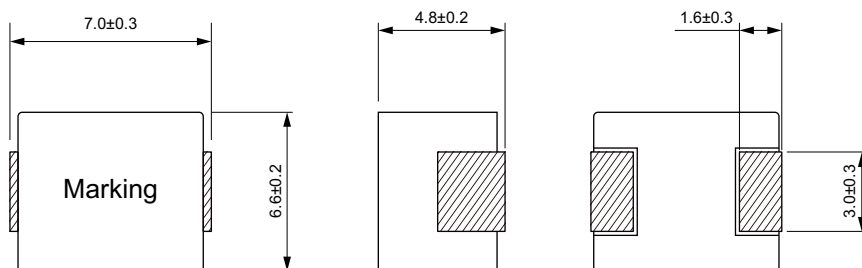

#### Land Pattern: [mm]



#### Electrical Properties:


	( $\mu\text{H}$ )		( $\text{m}\Omega$ )	Saturation	
MDE0650-R47M	0.47	$\pm 20\%$	3.90	21.0	20.0
MDE0650-R68M	0.68	$\pm 20\%$	4.50	18.0	
MDE0650-1R0M	1.00	$\pm 20\%$	6.60	16.0	12.0
MDE0650-1R5M	1.50	$\pm 20\%$	10.0	13.0	9.50
MDE0650-2R2M	2.20	$\pm 20\%$		11.0	9.00
MDE0650-3R3M	3.30	$\pm 20\%$	22.0	10.0	8.50
MDE0650-4R7M	4.70	$\pm 20\%$	29.0	8.00	6.00
MDE0650-6R8M	6.80	$\pm 20\%$	41.0	6.30	5.80
MDE0650-8R2M	8.20	$\pm 20\%$	48.0	5.50	5.50
MDE0650-100M	10.0	$\pm 20\%$	60.0	5.30	4.50
MDE0650-150M	15.0	$\pm 20\%$	90.0	4.00	3.10
MDE0650-220M	22.0	$\pm 20\%$	140	3.50	2.60
MDE0650-330M	33.0	$\pm 20\%$	190	3.00	2.30
MDE0650-470M	47.0	$\pm 20\%$	230	2.60	2.00
MDE0650-680M	68.0	$\pm 20\%$		1.70	1.20

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is  $\Delta T=40^{\circ}\text{C}$

## Typical Electrical Characteristics:

### Inductance vs DC Current Characteristics:

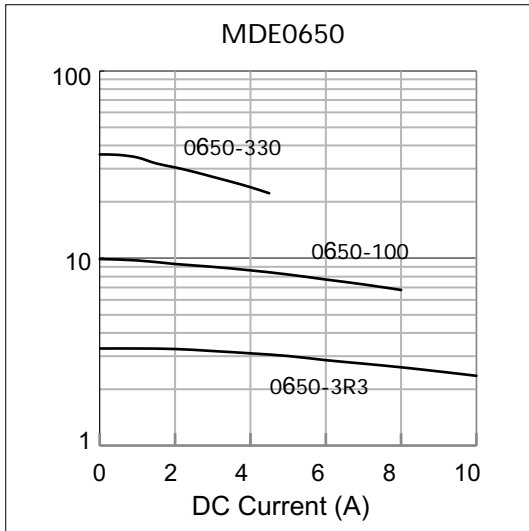

### Temperature Rise vs DC Current Characteristics:

