


SCM Series







FEATURES

-
-
-
-










C




APPLICATIONS


-
-




Part No		Tol.	Rated Current Max. (A)	DCR Max. (Ω)	Rated Volt. Max. (V)	Test Condition
SCM9250-100Y	10	+50% / -30%				
SCM9250-S100Y	10	+50% / -30%				
SCM9250-250N	25	±30%				
SCM9250-S250N	25	±30%				
SCM9250-400N	40	±30%				
SCM9250-S400N	40	±30%				
SCM9250-510N	51	±30%				
SCM9250-S510N	51	±30%				
SCM9250-251Y	250	±50%				
SCM9250-501Y	500	±50%				
SCM9250-102Y	1000	±50%				
SCM9250-202Y	2000	±50%				
SCM9250-472Y	4700	±50%				
SCM9250-652Y	6500	±50%				
SCM9250-103Y	10000	±50%				

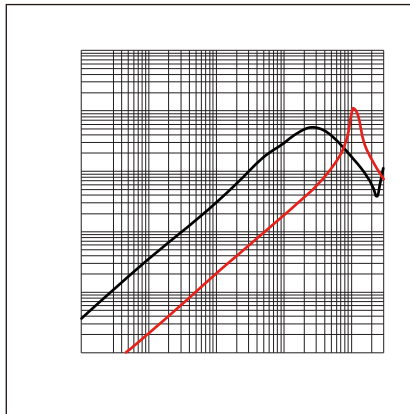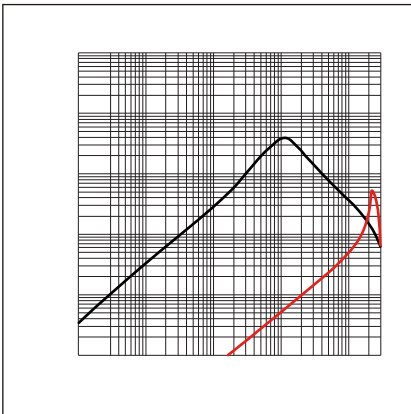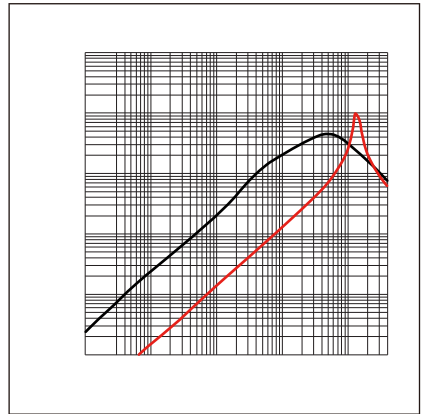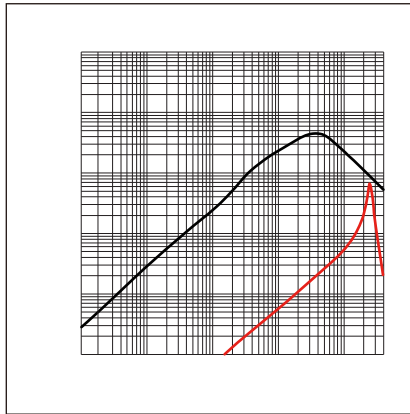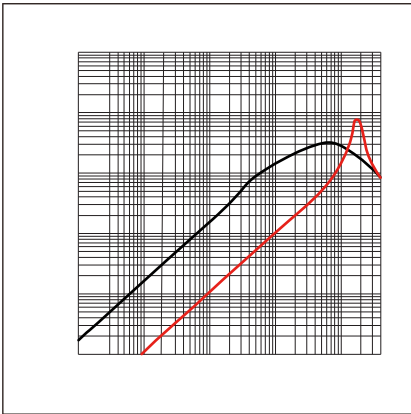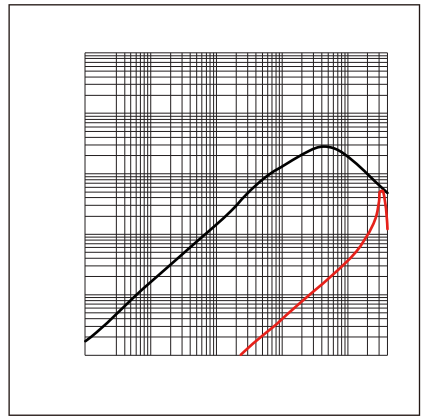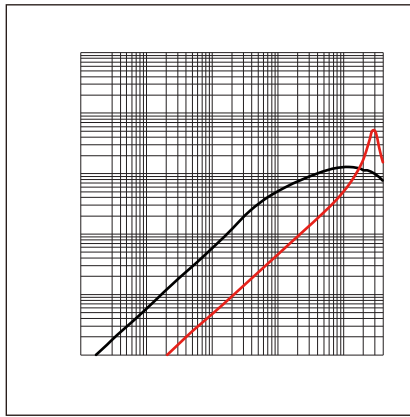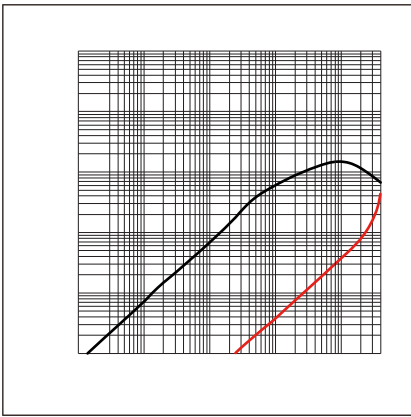

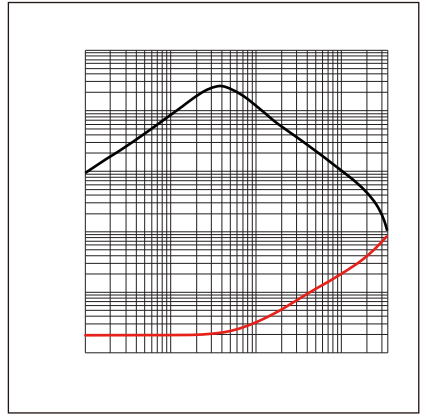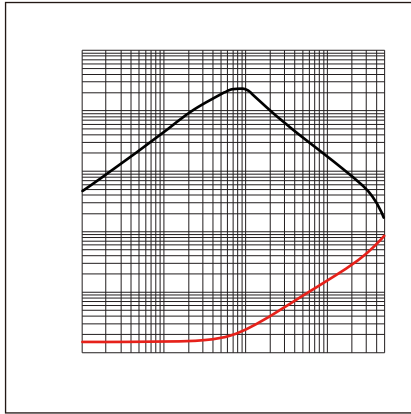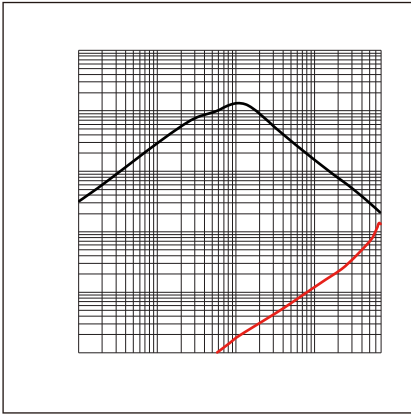


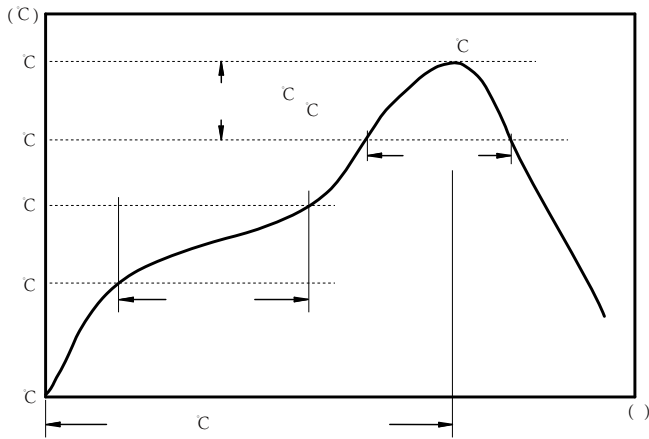

C
C
C

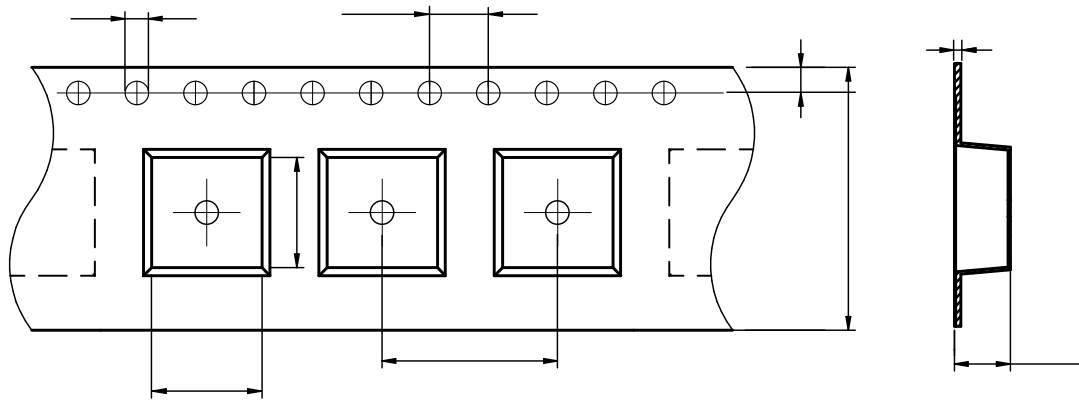




SCM9250	6.5 typ	9.7 typ	1.5±0.1	4.0±0.1	12.0±0.1	16.0±0.3	5.7 ref	1.75±0.1	0.4±0.1
---------	---------	---------	---------	---------	----------	----------	---------	----------	---------

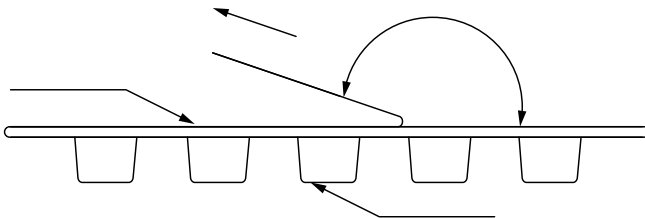

The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	Dot+Printing (Duplex winding) /Printing (Split winding)
---------	---------------------------------------------------------

:

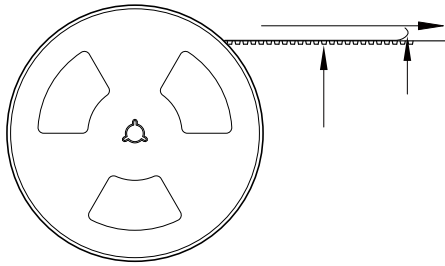

1000 Pcs/Reel

2 Reel /Inner box(2000 Pcs)

3 Inner box/Carton box(6K Pcs)

: