



WWCI Series




CHARACTERISTICS

-
-
-
-

APPLICATION

-

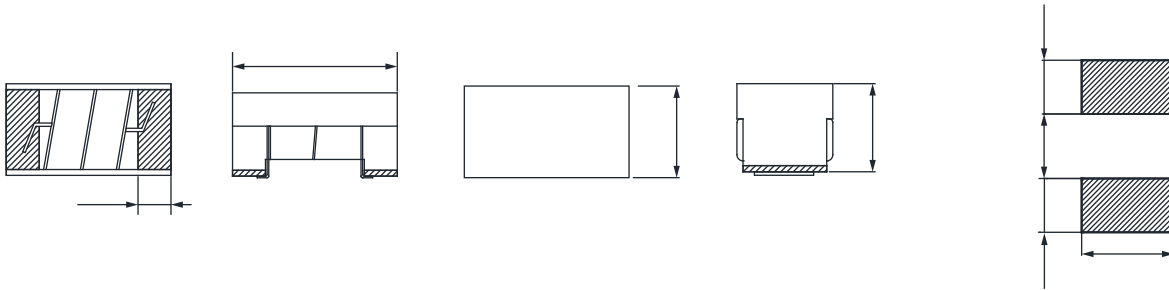

Part No.	Material	Condition	Dimensions	Weight	Lead Time	Notes
					26	
					29	
	2					
					32	
					35	
			±5%			
			±5%		43	
			±5%		45	
			±5%		45	
			±5%	23	49	
			±5%	23	46	
			±5%	23	49	
			±5%			
			±5%	25		
			±5%	25	49	
			±5%			




		Condi on				()	
	9		±5%		25	49	
			±5%			45	
			±2%		23		
			±5%		23		
			±2%		26	56	
			±5%		26	56	
			±2%		26		
			±5%		26		
			±2%		24	54	
			±5%		24	54	
			±2%		26	54	
			±5%		26	54	
			±2%		24	54	
			±5%		24	54	
			±2%		25	52	
			±5%		25	52	
			±2%		26		
			±5%		26		
			±2%		25		
			±5%		25		
	22		±2%		25	52	
	22		±5%		25	52	
	23		±2%		26	53	
	23		±5%		26	53	
	24		±2%		25		
	24		±5%		25		
			±2%		26		
			±5%		26		
			±2%		25	46	
			±5%		25	46	
	33		±2%		24		
	33		±5%		24		
	36		±2%		26		
	36		±5%		26		
	39		±2%		25	45	
	39		±5%		25	45	
			±2%		26		
			±5%		26		
	43		±2%		25	46	
	43		±5%		25	46	
			±2%		26	46	
			±5%		26	46	
			±5%		25		



...	...	Condition	()	...
	56		±5%		22	42		
			±5%		22	36		
			±5%			34		
			±5%			33		
			±5%					
			±5%					
			±5%			29		

℃

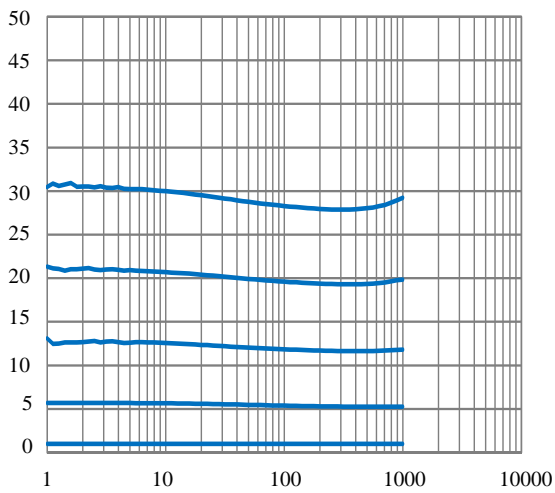

℃

1 10 100 1000 10000