

MDTA Series

Flat Wire Molded Inductor

Size 7030




FEATURES

- Composite core material allows high saturation currents
- Very low acoustic noise and very low leakage flux noise
- High inductance capability and handles high transient currents
- C-Q200 qualified
- Operating temperature -55 to +155 °C (Including self - temperature rise)
- Quantity: 1500pcs


APPLICATION

- DC/DC converters for entertainment/navigation systems
- Applications: windshield power mirrors / heating and ventilation blowers / HID lighting
- LED driv

Dimensions: [mm]

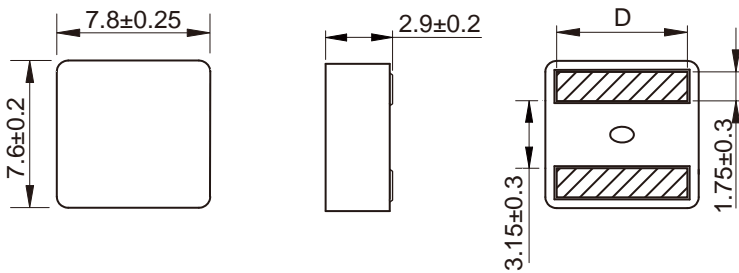

Land Pattern: [mm]




Electrical Properties:

Part No	L@100KHz /0.1V	Tolerance	I _{SAT} Typ.	I _R		R _{DC} Max.	D
				20°C rise	40°C rise		

Saturation Current will cause L to drop approximately 30%
 Temperature Rise Current that causes the specified temperature rise from 25°C ambient.

Soldering Reflow:

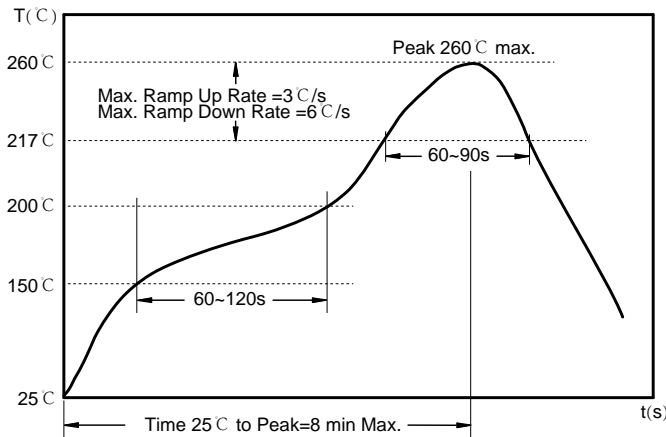

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C : 60~90 sec.


Max temperature: 260°C .

Max time at max temperature: 10 sec.

Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension :

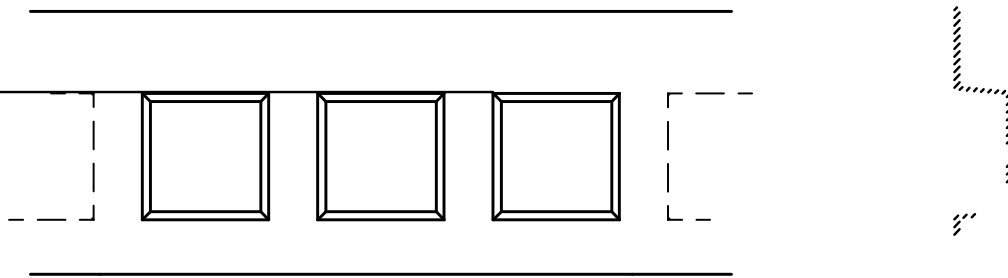

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTA7030	8.2±0.1	8.0±0.1	1.5±0.1	4.0±0.1	12.0±0.1	16.0±0.3	3.3±0.1	1.75±0.1	0.35±0.05

Peel force of top cover tape:

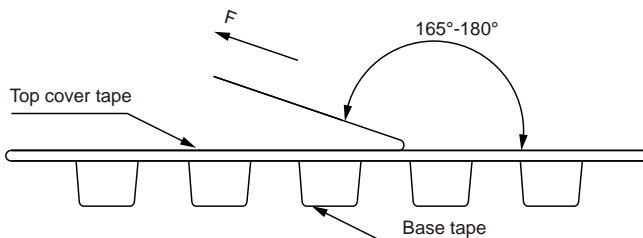


The peel force of top cover tape shall be between 0.1 to 1.3 N


Product Marking:

Marking	Printing (Inductance)
---------	-----------------------

Reel Dimension: [mm]

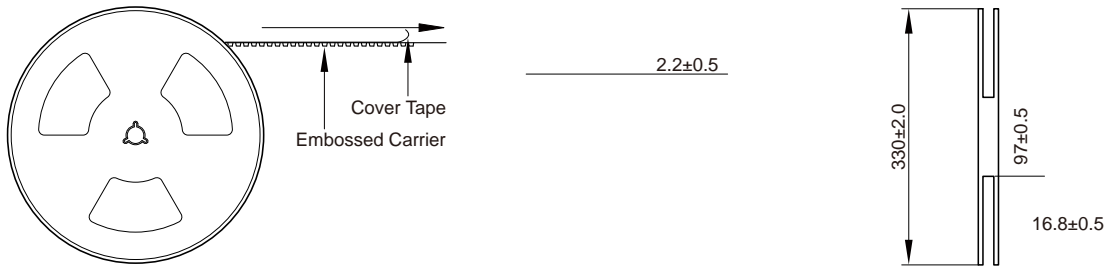

Packaging Quantity:

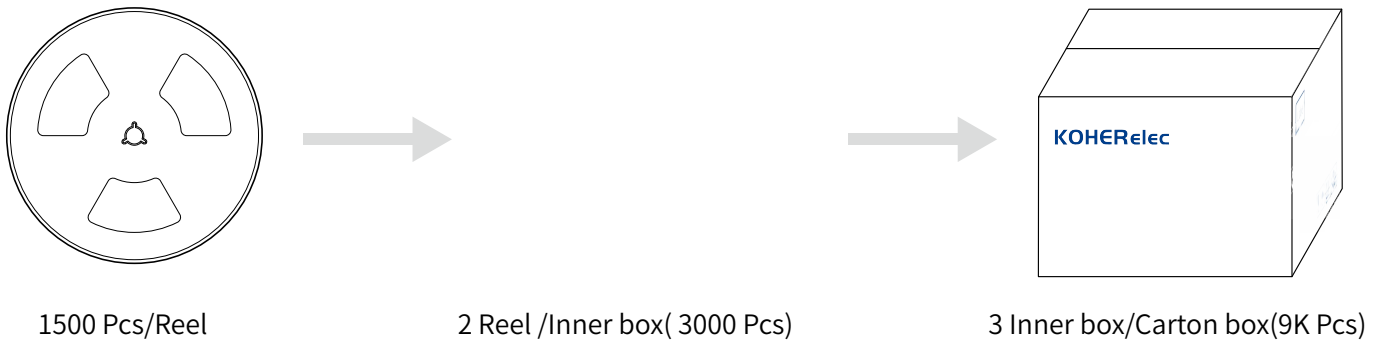

Cautions and Warnings:

Storage Conditions:

-
-
-
-

Operation Instructions:

-
-
-
-